

Project Name:	
Location:	
Item:	Qty:
Model:	

MCR-23FD/MCF-23FD

REACH-IN REFRIGERATOR/FREEZER



FEATURES

Maxx Cold reach-in refrigeration is built to last. Temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel construction ensures years of long life and maximum durability. Maxx Cold units are designed to meet the requirements of the most discriminating customer.

- Stainless steel exterior and interior ensures years of long life and maximum durability
- CFC-free polyurethane foam insulation
- (3) heavy-duty, adjustable, PE coated wire shelves per section
- Door locks and 4" diameter swivel casters come standard
- Utilizes environmentally friendly CFC-free refrigerant, Refrigerator R134A / Freezer - R134A
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding temperature:
Refrigerator: 28°F to 39°F, Freezer: 5°F to -9.4°F
- Open door alert, beeps when door has been open for 3 minutes
- Large evaporator and condenser for quick cooling and greater efficiency
- Automatic interior lighting
- Self contained system
- Recessed handles
- Available in 120V/60Hz, 220V/50Hz, and 220V/60Hz






Specifications subject to change without notice.

Approvals: ETL, ETL sanitation

MCR-23FD/MCF-23FD

REACH-IN REFRIGERATOR/FREEZER

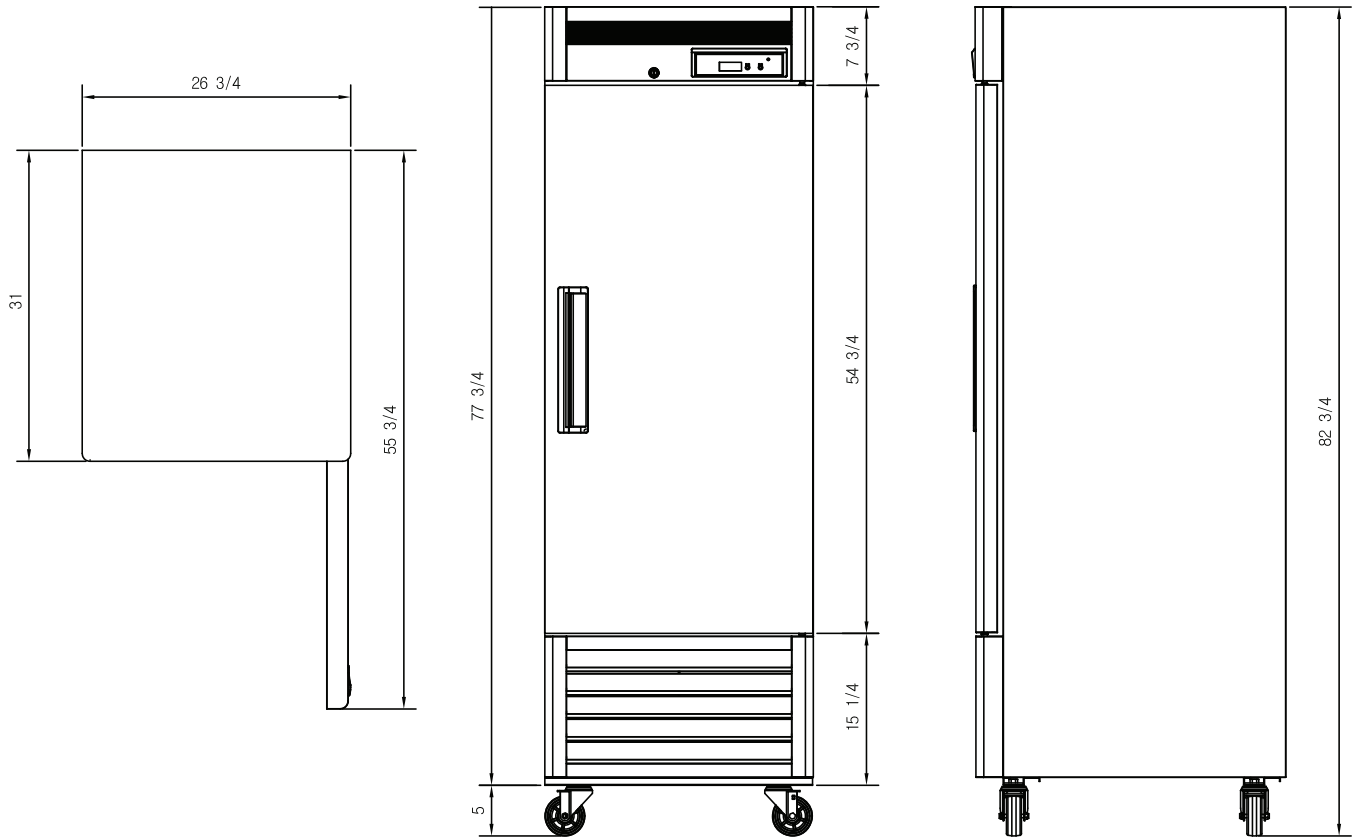

SPECIFICATIONS

Model	Dim (WxDxH")	Capacity	Temp	Watts	Doors	Weight	Shelves
MCR-23FD	26.75 x 31 x 82.75 (1839x838x1120mm)	23 Cu Ft	28°F to 39°F	690	1	271 LB 123 KG	3
MCF-23FD	26.75 x 31 x 82.75 (1839x838x1120mm)	23 Cu Ft	-9°F to 5°F	805	1	284 LB 129 KG	3