

Project Name:

Location:

Item:

Qty.:

Model:

# MCR-49FD/MCF-49FD

# REACH IN REFRIGERATOR/FREEZER

## FEATURES

**Maxx Cold reach-in refrigerators are built to last. All units feature a bottom mount compressor to provide energy savings and ease of service. The temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel construction ensures years of long life and maximum durability. Maxx Cold units are designed with energy savings in mind.**



MODEL MCR-49FD/MCF-49FD

- Stainless steel exterior and interior ensures years of long life and maximum durability
- Simple plug-in installation
- Internal storage capacity is 49 cu. ft / 1387L
- CFC-free polyurethane foam insulation
- (6) heavy-duty, adjustable, PE coated wire shelves
- Door locks and 4" diameter swivel casters come standard
- Utilizes environmentally friendly CFC-free refrigerant, Refrigerator - R134A / Freezer - R404A
- Bottom mount compressor provides energy savings and ease of service
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding temperature: Refrigerator 28°F/-2.22°C to 39°F/3.88°C  
Freezer 5°F/-15°C to -9.4°F/-23°C
- Open door alert, beeps when door has been open for 5 minutes
- Large evaporator and condenser for quick cooling and greater efficiency
- Horsepower: Refrigerator - 1/3 HP / Freezer - 3/4 HP
- Automatic interior lighting
- Self contained system
- Recessed handles




Specifications subject to change without notice.

Approvals:

# MCR-49FD/MCF-49FD

## REACH IN REFRIGERATOR/FREEZER

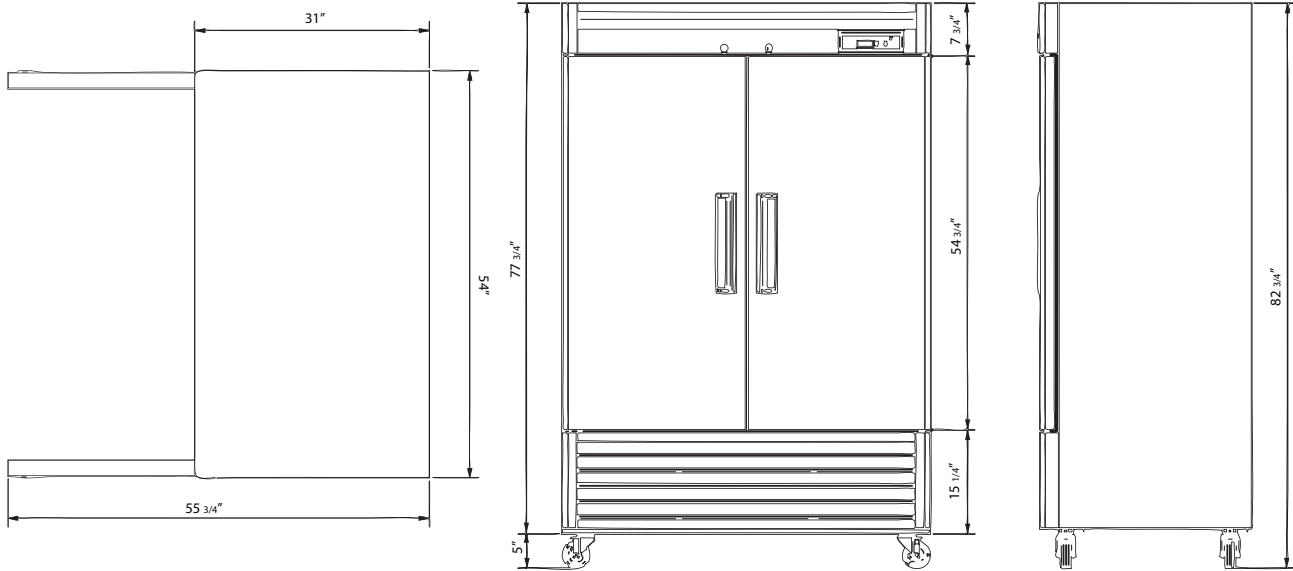

### Dimensional Data

Model	Width	Depth	Height	Weight	Voltage	Hp	Amps	Refrigerant	Cubic Ft.	Holding Temperature
MCR-49FD	54" 1372 mm	31" 787 mm	82 3/4" 2102 mm	397 lb. 211 kg	115V/60Hz 220V/50Hz 220V/60Hz	1/3	7 3.5	R134A	49 Cu. Ft. 1887 L	28°F/-2°C to 39°F/4°C
MCF-49FD	54" 1372 mm	31" 787 mm	82 3/4" 2102 mm	403 lb. 2102 mm	115V/60Hz 220V/50Hz 220V/60Hz	3/4	10.9 5.45	R404A	49 Cu. Ft. 1887 L	5°F/-15°C to -9°F/-23°C

#### MaxxCold reach-in Refrigeration is built to last.

- Stainless steel exterior and interior ensures years of long life and maximum durability
- Simple plug-in installation
- Internal storage capacity is 49 cu. ft / 1387L
- CFC-free polyurethane foam insulation
- (6) heavy-duty, adjustable, PE coated wire shelves
- Door locks and 4" diameter swivel casters come standard
- Utilizes environmentally friendly CFC-free refrigerant, Refrigerator - R134A / Freezer - R404A
- Bottom mount compressor provides energy savings and ease of service
- Automatic defrost system

- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior.
- Holding temperature: Refrigerator 28°F/-2°C to 39°F/4°C Freezer 5°F/-15°C to -9°F/-23°C
- Open door alert, beeps when door has been open for 5 minutes
- Large evaporator and condenser for quick cooling and greater efficiency
- Horsepower: Refrigerator - 1/3 HP / Freezer - 3/4 HP
- Automatic interior lighting
- Self contained system
- Recessed handles