

Project Name:	
Location:	
Item:	Qty:
Model:	

MCR-23FD / MCF-23FD / MCR-49FD / MCF-49FD

## REACH-IN REFRIGERATION







Doors are reversible (additional parts required)



MCR-49FD MCF-49FD



#### **FEATURES**

Maxx Cold reach-in refrigeration is built to last. Temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel construction ensures years of long life and maximum durability. Maxx Cold units are designed to meet the requirements of the most discriminating customer.

- Stainless steel exterior and interior ensures years of long life and maximum durability
- CFC-free polyurethane foam insulation
- (3) heavy-duty, adjustable, PE coated wire shelves per section
- · Door locks and 4" diameter swivel casters come standard

- Utilizes environmentally friendly CFC-free refrigerant, Refrigerator R134A / Freezer - R404A
  - \*Except Freezer MCF-23FD uses R134A
- · Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding temperature:
  Refrigerator: 28°F to 39°F, Freezer: 5°F to -9.4°F
- Tremgerator. 20 1 to 33 1, 1166261. 3 1 to -3.4 1
- Open door alert, beeps when door has been open for 3 minutes
- · Large evaporator and condenser for quick cooling and greater efficiency
- · Automatic interior lighting
- · Self contained system
- · Recessed handles
- Available in 120V/60Hz, 220V/50Hz and 208-230V/60Hz (MCF-72FD is 115/208-230V/60Hz)



Specifications subject to change without notice.


Approvals: ETL, ETL Sanitation approved



### MCR-23FD / MCF-23FD / MCR-49FD / MCF-49FD

# REACH-IN REFRIGERATION

#### **DIMENSIONS**

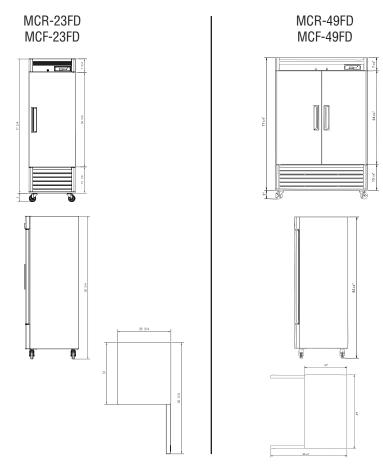

Model	Dim (W"xD"xH")	Capacity	Temp	Watts	Doors	Weight	Shelves
MCR-23FD <sub>eugy</sub> Refrigerator	26.75 x 31 x 82.75 680x787.4x2102mm	23 Cu Ft 651 L	28° to 39°F -2° to 4°C	690	1	271 lb 123 kg	3
MCF-23FD ewgy Freezer	26.75 x 31 x 82.75 680x787.4x2102mm	23 Cu Ft 651 L	-9° to 5° F -23° to -15° C	805	1	284 lb 129 kg	3
MCR-49FD emgyn Refrigerator	54 x 31 x 82.75 1372x787.4x2102mm	49 Cu Ft 1,387 L	28° to 39°F -2° to 4°C	805	2	397 lb 180 kg	6
MCF-49FD engy (	54 x 31 x 82.75 1372x787.4x2102mm	49 Cu Ft 1,387 L	-9° to 5° F -23° to-15° C	1254	2	403 lb 183 kg	6

<sup>\*</sup> Requires NEMA L14-20P plug