

Project Name:	
Location:	
Item:	Qty:
Model:	

MCR-23FD / MCF-23FD / MCR-49FD / MCF-49FD

REACH-IN REFRIGERATION



MCR-23FD
MCF-23FD



MCR-49FD
MCF-49FD



Doors are reversible
(additional parts required)

FEATURES

Maxx Cold reach-in refrigeration is built to last. Temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel construction ensures years of long life and maximum durability. Maxx Cold units are designed to meet the requirements of the most discriminating customer.

- Stainless steel exterior and interior ensures years of long life and maximum durability
- CFC-free polyurethane foam insulation
- (2) heavy-duty, adjustable, PE coated wire shelves per section
- Door locks and 4" diameter swivel casters come standard

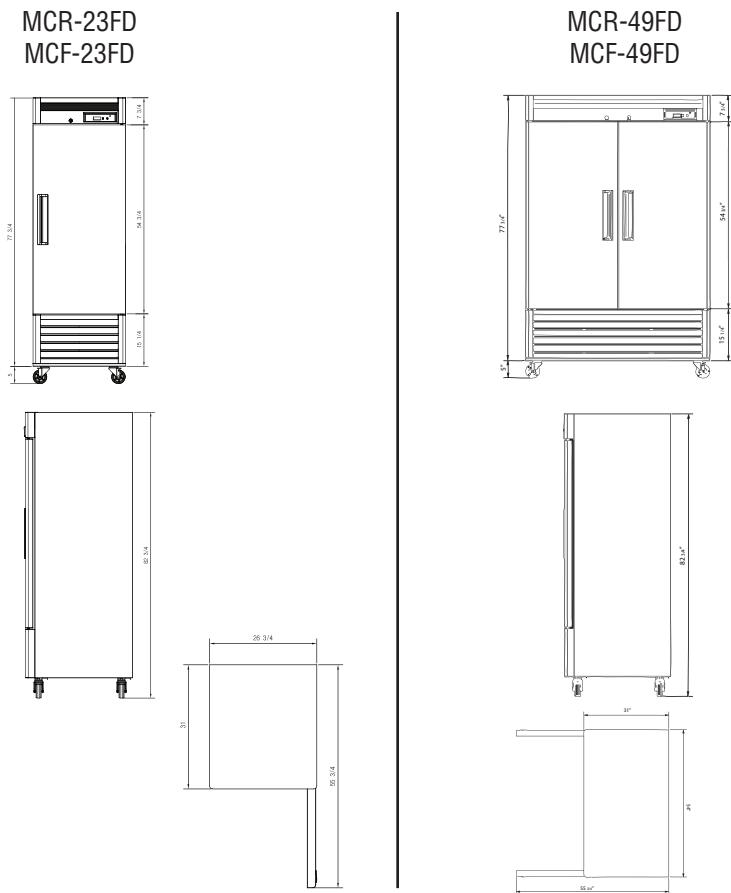
- Utilizes environmentally friendly CFC-free refrigerant, Refrigerator R134A / Freezer - R404A
*Except Freezer MCF-23FD uses R134A
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding temperature:
Refrigerator: 28°F to 39°F, Freezer: 5°F to -9.4°F
- Open door alert, beeps when door has been open for 3 minutes
- Large evaporator and condenser for quick cooling and greater efficiency
- Automatic interior lighting
- Self contained system
- Recessed handles
- Available in 120V/60Hz, 220V/50Hz and 208-230V/60Hz







Specifications subject to change without notice.

Approvals: ETL, ETL Sanitation approved

DIMENSIONS



Model	Dim (W"xD"xH")	Capacity	Temp	Watts	Doors	Weight	Shelves
MCR-23FD  Refrigerator	26.75 x 31 x 82.75 680x787.4x2102mm	23 Cu Ft 651 L	28° to 39°F -2° to 4°C	690	1	271 lb 123 kg	3
MCF-23FD  Freezer	26.75 x 31 x 82.75 680x787.4x2102mm	23 Cu Ft 651 L	-9° to 5° F -23° to -15° C	805	1	284 lb 129 kg	3
MCR-49FD  Refrigerator	54 x 31 x 82.75 1372x787.4x2102mm	49 Cu Ft 1,387 L	28° to 39°F -2° to 4°C	805	2	397 lb 180 kg	6
MCF-49FD  Freezer	54 x 31 x 82.75 1372x787.4x2102mm	49 Cu Ft 1,387 L	-9° to 5° F -23° to -15° C	1254	2	403 lb 183 kg	6

* Requires NEMA L14-20P plug