

Project Name:

Location:

Item:

Qty.:

Model:

Under Counter Refrigerator/Freezer

- ▶ MCR27U
- ▶ MCF27U
- ▶ MCR36U
- ▶ MCF36U
- ▶ MCR48U
- ▶ MCF48U
- ▶ MCR60U
- ▶ MCF60U
- ▶ MCR72U
- ▶ MCF72U



MODEL MCR72U

FEATURES

Maxx Cold Under Counters are designed for performance. Stainless steel interior and exterior ensures maximum durability. The MCR series features an easily serviced backmounted compressor.


- Stainless steel exterior and interior
- Urethane insulated walls and doors
- Recessed door handles
- Adjustable, heavy duty epoxy coated shelves, two per section
- Four 5" casters (2 locking, 2 non-locking)
- Easily serviced back mounted compressor
- Utilizes enviromentally friendly refrigerants using R134A for refrigerators and R404A for freezers
- Forced-air refrigeration
- Efficient cooling system (two or more fans)
- Self-contained
- Automatic defrost system
- NEMA 5-15P plug
- Temperature range:
Refrigerator 30°F to 45°F (-1°C to 7°C)
Freezer -1°F to -11°F (-18°C to 24°C)



Specifications subject to change without notice.

Approvals:

Under Counter Refrigerator/Freezer

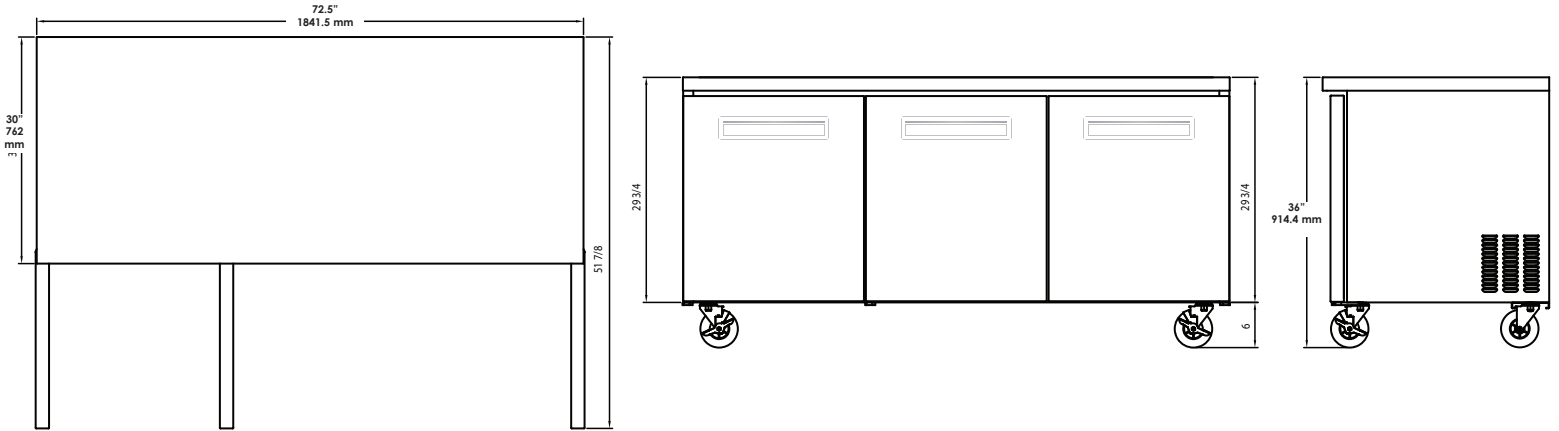

MODEL MCR72U

Dimensional Data

Model	Width	Depth	Height	Voltage	Amps	HP	# of Shelves
MCR27U	27.5" 699 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	3.2 1.6	1/5	2
MCF27U	27.5" 699 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	5.2 2.6	3/8	2
MCR36U	36" 914 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	3.2 1.6	1/5	2
MCF36U	36" 914 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	5.2 2.6	3/8	2
MCR48U	48.5" 1232 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	6.0 3.0	1/5	4
MCF48U	48.5" 1232 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	7.5 3.75	1/2	4
MCR60U	60.5" 1537 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	6.0 3.0	3/8	4
MCF60U	60.5" 1537 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	7.5 3.75	1/2	4
MCR72U	72.5" 1842 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	6.1 3.0	3/8	6
MCF72U	72.5" 1842 mm	30" 762 mm	36" 914 mm	115V/60 Hz 220V/50 Hz	7.8 3.9	1/2	6